

AirROC D35 (LM 100)

Surface drill rigs
Hole range : 76 - 115 mm



Features and technical information


For further information, please contact your Customer Center

The AirROC D35* is the smallest and most popular of our crawler mounted, Down the hole drilling rigs. This robust pneumatic rig is self propelled, easy to operate and simple to maintain. A single operator machine with outstanding flexibility, the AirROC D35* is an ideal choice for development work in confined areas or production drilling on developed benches.

This compact crawler has a main frame walking beam oscillator that ensures tracks adapt to uneven terrain. Tramming controls are located beside the left track. A 7.5 hp (5.5 kW) air powered hydraulic pump ensures efficient operational positioning. Powered by two independent 4.5 hp air motors for quick and smooth tramming the AirROC D35* is equipped with the heavy duty BRH rotary head for Down-the-Hole drilling.



Drill coverage area

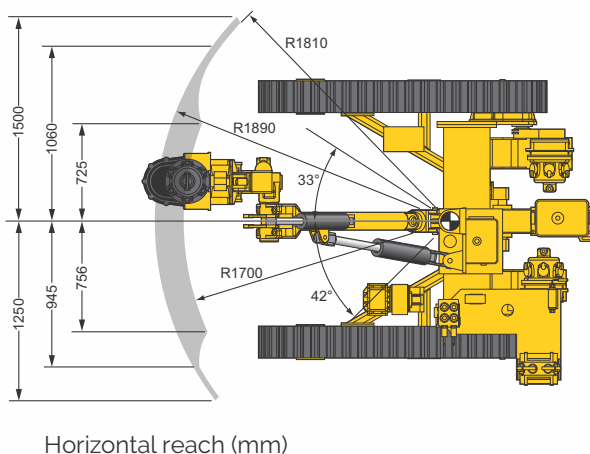

Technical data

Carrier

Tramming speed, max	3.2 km/h	2.0 mph
Track oscillation	±20°	

Steel feed

Feed extension	750 mm	29.4"
Feed rate, max	0.3 m/s	59.0 ft/min
Feed force, max	21 kN	4 720 lbf
Tractive pull, max	15 kN	3 372 lbf
Total length	5 130 mm	202"
Travel length	3 565 mm	140.4"

Drill tube size	64, 76 mm	2.5", 3"
-----------------	-----------	----------

Transport dimensions

Transportation position

Height	2 325 mm	7'7 1/2"
Length	5 120 mm	16'9 1/2"
Width	1 940 mm	6'4 1/2"

Weight	2 690 kg	5 930 lb
--------	----------	----------

United in performance. Inspired by innovation.

Performance unites us, innovation inspires us, and commitment drives us to keep moving forward. Count on Epiroc to deliver the solutions you need to succeed today and the technology to lead tomorrow.
epiroc.com



Epiroc Mining India Limited

Bombay - Pune Road, Sveanagar Dapodi, Pune 411012, Maharashtra - India.

Email: miningtechnique.india@epiroc.com